



CONTACTOR, AC-3 15 KW/400 V, DC 24 V,  
3-POLE, 2 NO + 2 NC, SIZE S2,  
SCREW CONNECTION

### General details:

<b>Product brand name</b>		SIRIUS
<b>product designation</b>		power contactor
<b>Size of the contactor</b>		S2
<b>Protection class IP / on the front</b>		IP20
<b>Degree of pollution</b>		3
<b>Installation altitude / at a height over sea level / maximum</b>	m	2,000
<b>Ambient temperature / during operating</b>	°C	-25 ... +60
<b>Active power loss / per conductor / typical</b>	W	1.8
<b>Item designation</b>		
<ul style="list-style-type: none"> <li>• according to DIN EN 61346-2</li> <li>• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750</li> </ul>		Q K
<b>Mechanical operating cycles as operating time</b>		
<ul style="list-style-type: none"> <li>• of the contactor / typical</li> <li>• of the contactor with added auxiliary switch block / typical</li> <li>• of the contactor with added electronics-compatible auxiliary switch block / typical</li> </ul>		10,000,000 10,000,000 5,000,000

### Main circuit:

<b>Number of poles / for main current circuit</b>		3
---	--	---

<b>Number of NC contacts / for main contacts</b>		0
<b>Number of NO contacts / for main contacts</b>		3
<b>Operating current / at AC-1 / at 400 V / at 40 °C ambient temperature / rated value</b>	A	50
<b>Operating current / at AC-1 / at 400 V / at 60 °C ambient temperature / rated value</b>	A	45
<b>Operating current</b>		
• at AC-3 / at 400 V / rated value	A	32
• with 1 current path		
• at DC-1		
• at 24 V / rated value	A	45
• at 110 V / rated value	A	4.5
• at DC-3 / at DC-5		
• at 24 V / rated value	A	35
• at 110 V / rated value	A	2.5
• with 2 current paths in series		
• at DC-1		
• at 24 V / rated value	A	45
• at 110 V / rated value	A	45
• at DC-3 / at DC-5		
• at 24 V / rated value	A	45
• at 110 V / rated value	A	25
• with 3 current paths in series		
• at DC-1		
• at 24 V / rated value	A	45
• at 110 V / rated value	A	45
• at DC-3 / at DC-5		
• at 24 V / rated value	A	45
• at 110 V / rated value	A	45
<b>Service power</b>		
• at AC-1 / at 400 V / rated value	kW	31
• at AC-2 / at 400 V / rated value	kW	15
• at AC-3		
• at 400 V / rated value	kW	15
• at 500 V / rated value	kW	18.5
• at 690 V / rated value	kW	18.5
<b>Control circuit:</b>		
<b>Design of activation</b>		conventional
<b>Type of voltage / of the controlled supply voltage</b>		DC
<b>Control supply voltage / 1</b>		

- for DC

- rated value

V

24

### Auxiliary circuit:

#### Contact reliability / of the auxiliary contacts

1 faulty switching per 100 million (17 V, 1 mA)

#### Number of NC contacts / for auxiliary contacts

- instantaneous switching
- lagging switching

2

0

#### Number of NO contacts / for auxiliary contacts

- instantaneous switching
- leading switching

2

0

#### Operating current / of the auxiliary contacts

- at AC-12 / maximum
- at AC-15
  - at 230 V
  - at 400 V
- at DC-12
  - at 60 V
  - at 110 V
  - at 220 V
- at DC-13
  - at 24 V
  - at 60 V
  - at 110 V
  - at 220 V

A

10

A

6

A

3

A

6

A

3

A

1

A

10

A

2

A

1

A

0.3

### Short-circuit:

#### Design of the fuse link

- for short-circuit protection of the auxiliary switch / required
- for short-circuit protection of the main circuit
  - with type of assignment 1 / required
  - at type of coordination 2 / required

fuse gL/gG: 10 A

fuse gL/gG: 125 A

fuse gL/gG: 63 A

### Installation/mounting/dimensions:

#### Type of mounting

screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022

#### series installation

Yes

#### Width

mm

55

#### Height

mm

112

#### Depth

mm

179

#### Distance, to be maintained, to earthed part / sideways

mm

6

## Connection type:

### Design of the electrical connection

- for main current circuit
- for auxiliary and control current circuit

screw-type terminals

screw-type terminals

### Identification number and letter for switching elements

22 E

## Certificates/approvals:

### General Product Approval

Functional Safety /  
Safety of  
Machinery



CQC



CSA

[KETI](#)

[ROSTEST](#)



UL

[SUVA](#)

### Test Certificates

[Manufacturer](#)

### Shipping Approval



ABS



BUREAU  
VERITAS



DNV



GL



LRS

### Shipping Approval

other



RMRS

[Manufacturer](#)

[other](#)

## Further information:

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

### CAX-Online-Generator



<http://www.siemens.com/cax>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RT1034-1BB44-3MA0/all>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RT1034-1BB44-3MA0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT1034-1BB44-3MA0)

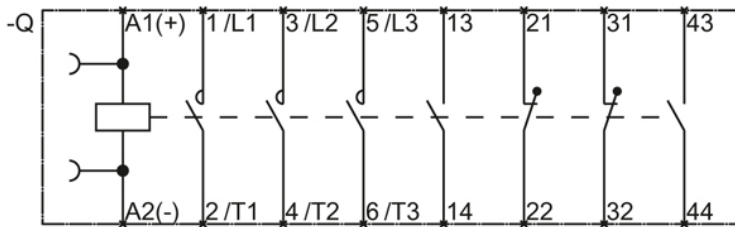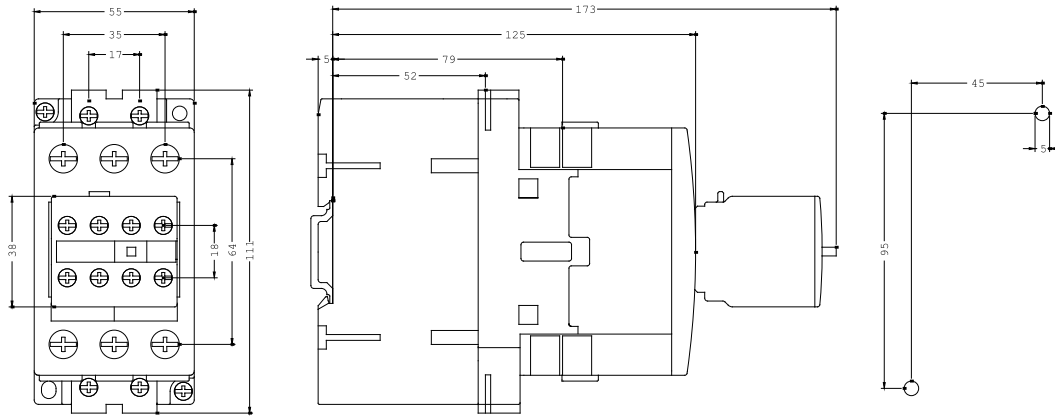

last change:

Sep 30, 2011