

Operator panel, installation in control cabinet door or front plate, can be plugged onto basic unit or extension modules, 10 LEDs for status display and 5 freely assignable keys for manual control, light gray



<b>product brand name</b>	SIRIUS
<b>product designation</b>	operator panels
<b>General technical data</b>	
insulation voltage rated value	300 V
<b>surge voltage resistance rated value</b>	4 000 V
protection class IP on the front	IP54
<b>vibration resistance</b>	1-6 Hz / 15 mm; 6-500 Hz / 2 g
<b>reference code acc. to IEC 81346-2</b>	A
<b>Electromagnetic compatibility</b>	
EMC emitted interference acc. to IEC 60947-1	class A
<b>EMC immunity acc. to IEC 60947-1</b>	corresponds to degree of severity 3
<b>conducted interference</b>	
• due to burst acc. to IEC 61000-4-4	1 kV
• due to conductor-earth surge acc. to IEC 61000-4-5	2 kV
• due to conductor-conductor surge acc. to IEC 61000-4-5	1 kV
<b>field-based interference acc. to IEC 61000-4-3</b>	10 V/m
<b>Installation/ mounting/ dimensions</b>	
<b>mounting position</b>	any
<b>fastening method</b>	front panel mounting
<b>height</b>	36 mm
<b>width</b>	96 mm
<b>depth</b>	44 mm
<b>Ambient conditions</b>	
<b>installation altitude at height above sea level</b>	
• maximum	4 000 m
• 1 maximum	2 000 m
• 2 maximum	3 000 m; max. +50 °C (no protective separation)
• 3 maximum	4 000 m; max. +40 °C (no protective separation)
<b>environmental category</b>	
• during operation acc. to IEC 60721	3K6 (no formation of ice, no condensation, relative humidity 10 ... 95%), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
• during storage acc. to IEC 60721	1K6 (no condensation, relative humidity 10 ... 95%), 1C2 (no salt mist), 1S2 (sand must not get into the devices), 1M4
• during transport acc. to IEC 60721	2K2, 2C1, 2S1, 2M2
<b>Certificates/ approvals</b>	
<b>General Product Approval</b>	<b>EMC</b>
	<b>Declaration of Conformity</b>



Test Certificates

Marine / Shipping

other

[Type Test Certificates/Test Report](#)



[Confirmation](#)

other

[PROFINET-Certification](#)



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UF7200-1AA00-0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF7200-1AA00-0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<https://support.industry.siemens.com/cs/ww/en/ps/3UF7200-1AA00-0>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3UF7200-1AA00-0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UF7200-1AA00-0&lang=en)

Test report No. A0258, protective separation

<https://support.industry.siemens.com/cs/ww/en/view/109748152>

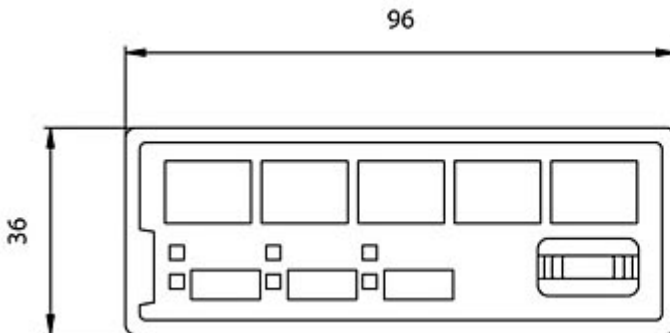

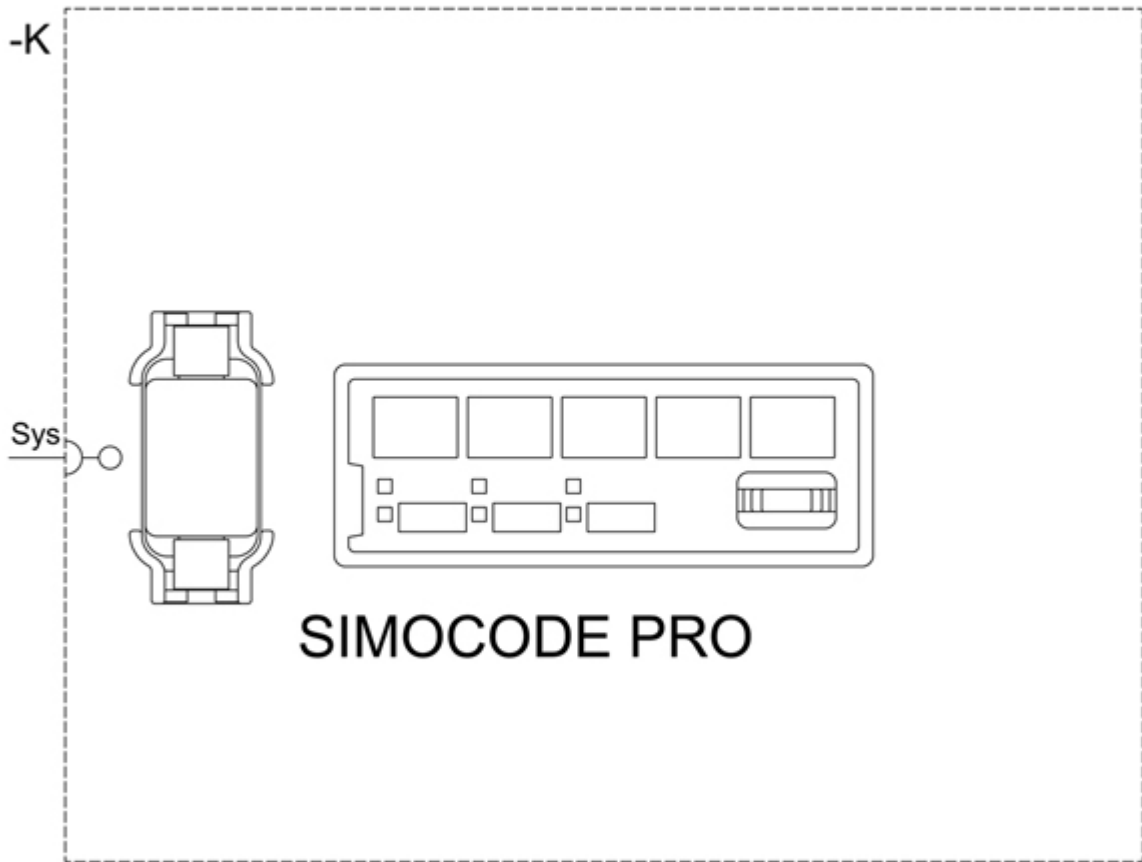

last modified:

1/18/2021 