



Product data sheet

Specifications



soft starter for asynchronous motor,
Altistart 48, 124A, 208..690V,
30..110kW

ATS48C14Y

-  **Discontinued on:** 30 April 2023
-  **To be end-of-service on:** 31 December 2030

 To be discontinued

Price* : 2,646.00 USD

Main

Range of Product	Altistart 48
Product or Component Type	Soft starter
Product destination	Asynchronous motors
Product Specific Application	Heavy duty industry and pumps
Device short name	ATS48
Utilisation category	AC-53A
Ue power supply voltage	208...690 V - 15...10 %
Power supply frequency	50...60 Hz - 5...5 %
Motor power kW	110 kW 660 V for standard applications 110 kW 690 V for standard applications 30 kW 230 V for severe applications 37 kW 230 V for standard applications 55 kW 400 V for severe applications 55 kW 440 V for severe applications 75 kW 400 V for standard applications 75 kW 440 V for standard applications 75 kW 500 V for severe applications 75 kW 525 V for severe applications 90 kW 500 V for standard applications 90 kW 525 V for standard applications 90 kW 660 V for severe applications 90 kW 690 V for severe applications
Maximum Horse Power Rating	100 hp 460 V for standard applications 100 hp 575 V for severe applications 125 hp 575 V for standard applications 30 hp 208 V for severe applications 40 hp 208 V for standard applications 40 hp 230 V for severe applications 50 hp 230 V for standard applications 75 hp 460 V for severe applications

Complementary

Device connection	In the motor supply line
Protection type	Phase failure line Thermal protection motor Thermal protection starter
Standards	EN/IEC 60947-4-2
Product Certifications	UL C-tick CSA TCF CCC

* Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

	NOM 117 DNV GOST SEPRO
Marking	CE
Discrete input number	5
Discrete input type	PTC, 750 Ohm 77 °F (25 °C) Stop, Run, LI3, LI4) logic, <= 8 mA 4300 Ohm
Discrete input logic	Positive logic Stop, Run, LI3, LI4 < 5 V <= 2 mA > 11 V, >= 5 mA
Minimum switching current	10 mA 6 V DC relay outputs
Discrete output number	2
Discrete output type	LO1) logic output 0 V common configurable LO2) logic output 0 V common configurable R1) relay outputs fault relay NO R2) relay outputs end of starting relay NO R3) relay outputs motor powered NO
Analogue output type	Current output AO 0-20 mA or 4-20 mA 500 Ohm
Communication port protocol	Modbus
Connector Type	1 RJ45
Communication data link	Serial
Physical interface	RS485 multidrop
Transmission Rate	4800, 9600 or 19200 bps
Function available	External bypass (optional)
Operating position	Vertical +/- 10 degree
Height	13.39 in (340 mm)
Width	7.87 in (200 mm)
Depth	10.43 in (265 mm)
Net Weight	27.34 lb(US) (12.4 kg)

Environment

Electromagnetic compatibility	Conducted and radiated emissions level A IEC 60947-4-2 Conducted and radiated emissions level B IEC 60947-4-2 Damped oscillating waves level 3 IEC 61000-4-12 Electrostatic discharge level 3 IEC 61000-4-2 Immunity to electrical transients level 4 IEC 61000-4-4 Immunity to radiated radio-electrical interference level 3 IEC 61000-4-3 Voltage/current impulse level 3 IEC 61000-4-5
Relative humidity	0...95 % without condensation or dripping water EN/IEC 60068-2-3
Ambient air temperature for operation	104...140 °F (40...60 °C) with current derating of 2 % per °C) 14...104 °F (-10...40 °C) without derating)
Ambient Air Temperature for Storage	-13...158 °F (-25...70 °C)
Operating altitude	<= 3280.84 ft (1000 m) without derating > 3280.84...6561.68 ft (> 1000...2000 m) with current derating of 2.2 % per additional 100 m

Ordering and shipping details

Category	22579-OPEN ATS48 ALTISTART
Discount Schedule	CP1G
GTIN	3389110982367
Returnability	No
Country of origin	ID

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	13.39 in (34 cm)
Package 1 Width	16.93 in (43 cm)
Package 1 Length	18.11 in (46 cm)
Package 1 Weight	32.83 lb(US) (14.892 kg)
Unit Type of Package 2	P06
Number of Units in Package 2	2
Package 2 Height	28.94 in (73.5 cm)
Package 2 Width	31.50 in (80 cm)
Package 2 Length	23.62 in (60 cm)
Package 2 Weight	85.98 lb(US) (39 kg)


Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
China RoHS Regulation	China RoHS declaration
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

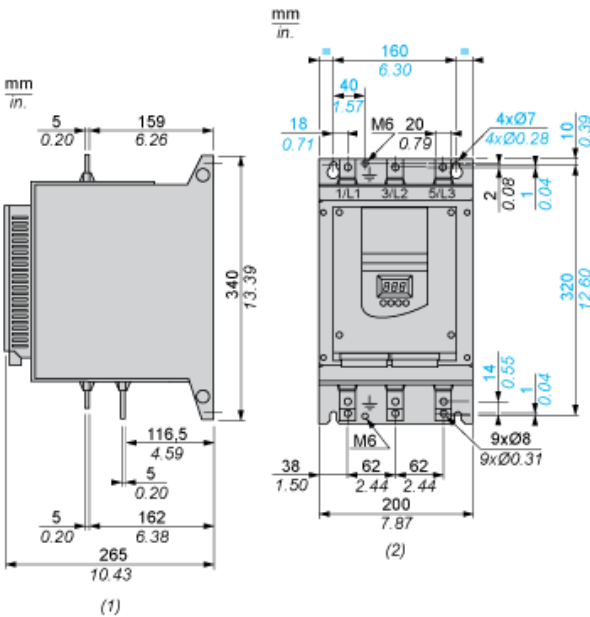

(1) Right View

(2) Front View

Clearance



Recommended replacement(s)

ATS48C14Y is replaced by:

1x



soft starter, Altistart 480, 140A, 208...690V AC, control supply 110...230V AC
ATS480C14Y