


\*\*\*Spare part\*\*\* SIMATIC TP 270 6" Touch panel 5.7" STN color display 2 MB configuration memory, configurable with ProTool From Version V6.0

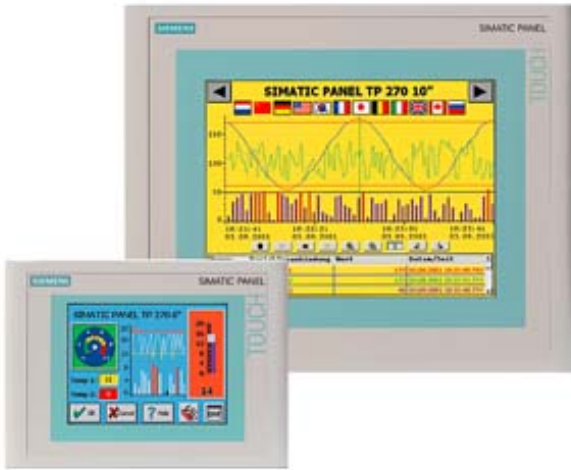

Display	
Design of display	STN, 256 colors
Screen diagonal	5.7 in
Resolution (pixels)	
• Horizontal image resolution	320 Pixel
• Vertical image resolution	240 Pixel
Backlighting	
• MTBF backlighting (at 25 °C)	40 000 h
Control elements	
Control elements	Touch screen
Keyboard fonts	
• Membrane keyboard — user-definable label membrane keys	No
• Numeric keyboard	Yes
• alphanumeric keyboard	Yes
• hexadecimal keyboard	Yes
• Multi-key operation	No
Touch operation	

• Design as touch screen	Yes; analog, resistive
<b>Connection type</b>	
• Type of connection for mouse/keyboard/barcode reader	USB / USB / USB
<b>Special operator controls</b>	
• Handwheel	No
<b>Installation type/mounting</b>	
Mounting position	vertical
maximum permissible angle of inclination without external ventilation	35°
<b>Supply voltage</b>	
UPS connectable (serial)	Yes
<b>Input current</b>	
Current consumption (rated value)	0.6 A
<b>Power</b>	
Active power input, typ.	15 W
<b>Processor</b>	
Processor type	RISC 32-bit
<b>Drives</b>	
Diskette drive	No
CD-ROM	No
Hard disk	No
<b>Memory</b>	
Type of memory	Flash / RAM
Memory available for user data	2 048 kbyte
<b>Battery</b>	
<b>Backup battery</b>	
• Backup battery (optional)	Yes; optional 3.6 V
• Backup time, min.	3 y
<b>Type of output</b>	
Info LED	No
Power LED	No
Error LED	No
<b>Time of day</b>	
<b>Clock</b>	
• Type	Hardware clock, battery backup, synchronizable
• retentive	Yes
• synchronizable	Yes

Interfaces	
Interfaces/bus type	2 x RS232, 1 x RS422, 1 x RS485 (max. 12 Mbit/s)
Number of RS 485 interfaces	1
<ul style="list-style-type: none"> <li>• Transmission rate, max.</li> </ul>	12 Mbit/s
USB port	Yes; 1 x USB
CF card slot	1 x CF card slot
Degree and class of protection	
IP (at the front)	IP65
IP (rear)	IP20
Standards, approvals, certificates	
Certifications	CE, GL, ABS, DNV, LRS, FM Class I Div. 2, UL, cULus, EX Zone 2/22, C-TICK
Ambient conditions	
Ambient temperature during storage/transportation	
<ul style="list-style-type: none"> <li>• min.</li> </ul>	-20 °C
<ul style="list-style-type: none"> <li>• max.</li> </ul>	60 °C
Relative humidity	
<ul style="list-style-type: none"> <li>• Operation, max.</li> </ul>	85 %
Operating systems	
pre-installed operating system	Windows CE
Configuration	
Configuration software	
<ul style="list-style-type: none"> <li>• Configuration tool</li> </ul>	ProTool Version 5 SP 3 or higher, or WinCC flexible Standard Version 2004 or higher (to be ordered separately)
Languages	
Online languages	
<ul style="list-style-type: none"> <li>• Number of online/runtime languages</li> </ul>	5
Project languages	
<ul style="list-style-type: none"> <li>• Languages per project</li> </ul>	32
Functionality under WinCC (TIA Portal)	
Libraries	Yes
Number of Visual Basic Scripts	
<ul style="list-style-type: none"> <li>• Debugging in the simulator</li> </ul>	No
Task planner	Yes
Help system	Yes
<ul style="list-style-type: none"> <li>• Number of characters per info text</li> </ul>	70
<ul style="list-style-type: none"> <li>• Number of tooltips</li> </ul>	0
Message system	
<ul style="list-style-type: none"> <li>• Number of alarm classes</li> </ul>	32
<ul style="list-style-type: none"> <li>• Number of messages</li> </ul>	4 000

• Bit messages	Yes
— Number of bit messages	2 000
• Analog messages	Yes
— Number of analog messages	2 000
• Telegram message procedure Alarm S	Yes
• System messages HMI	Yes
• System messages PLC	No
• System messages, other (SIMATIC S7, Sinumerik, Simotion, etc.)	No
• Lines	1
• Number of characters per message	70
• Number of process values per message	8
• Acknowledgment groups	Yes
• Message indicator	Yes
• acoustic feedback	No
• First/last value	Yes
<b>Recipe management</b>	
• Number of recipes	300
• Data records per recipe	500
• Entries per data record	1 000
• Recipe memory	64 KB integrated Flash, expandable
<b>Variables</b>	
• Number of variables per device	2 048
• Number of variables per screen	200
• Number of variables	2 048
• Type Date & Time	2 048
• Limit values	Yes
• Multiplexing	Yes
• Structures	Yes
<b>Images</b>	
• Number of configurable images	300
• Permanent window/default	Yes
• Start screen configurable	Yes
• Image selection by PLC	Yes
• Image number in the PLC	Yes
<b>Image objects</b>	
• Text objects	10,000 text elements
• Number of I/O fields per image	200
• Number of date/time fields	30
• Index of screen context	No
• Return	Yes

• Graphics object	Bit maps, icons, vector graphics
— Icons	1 000
— Icon (full screen)	0
<b>Complex image objects</b>	
• Status/control	With SIMATIC S7
• dynamic objects	Diagrams, bar graphs, invisible buttons
— Number of objects per project	500
— Number of curve diagrams per image	5
• Methods	Trend
• Bar graphs	
— Number of bars per chart	10
• Sliders	
— Number of slides per image	0
• Pointer instruments	
— Number of analog indicators per image	0
• Limit value lines	Yes
• Number of alphanumeric fields	1 000
— alphanumeric fields per image	100
• Number of numerical fields	1 000
— numerical fields per image	100
• Number of password fields	1 000
• Number of visible switches per project	1 000
— visible switches per image	100
— hidden switches per image	100
• Number of status switches per project	1 000
— Number of status switches per image	100
• Number of selector switches per project	1 000
— Selector switches per image	100
• Number of decade switches per project	0
— Decade switches per image	0
• Number of signal lamps per project	1 000
— Signal lamps per image	100
<b>Attributes for dynamic objects</b>	
• Color change	Yes
• X/Y movement	Yes
• Hide	Yes
• Angle of rotation	No
<b>Lists</b>	
• Number of text lists per project	500
• Number of entries per text list	256
• Number of graphics lists per project	400

• Number of graphic lists per image	10
• Number of entries per graphics list	255
<b>Archiving</b>	
• Number of archives per device	20
• Number of measuring points per project	20
• Number of entries per archive	10 000
• Message archive	Yes
• Process value archive	Yes
• Archiving methods	Sequence archive, circular log, alarm log, process value archive
— Sequential archive	Yes
— Short-term archive	Yes
• Memory location	CF card, Ethernet
— PC card	No
— CF card	Yes
— USB memory	No
— Ethernet	Yes
• Data storage format	CSV file, readable, e.g. with MS Excel, MS Access
— CSV	Yes
— TXT	No
• external evaluation	Readable, e.g. with MS Excel, MS Access, etc.
• Size of archive	depending on free memory on ext. card/stick or on free hard disk space via network drive
• Online evaluation	via trends
— using trend curves	Yes
<b>Filters</b>	
• cyclic	Yes
• Tolerance	Yes
• Change	Yes
<b>Security</b>	
• Number of user groups	50
• Number of user rights	32
• Password export/import	Yes
<b>Logging through printer</b>	
• Recording/Printing	Alarms, report (shift report), color print, hardcopy
<b>Transfer (upload/download)</b>	
• Transfer of configuration	MPI/PROFIBUS DP, serial, USB, Ethernet, automatic transfer recognition
<b>Process coupling</b>	
• Connection to controller	S5, S7-200, S7- 300/400, TI 505, Win AC, PC (TCP/IP), SINUMERIK, SIMOTION, Allen Bradley (DF1), Allen Bradley (DF485), Mitsubishi (FX), Telemecanique (ADJUST), OMRON (LINK/Multilink), Modicon (Modbus), for further non-Siemens drivers, see section on "System interfaces"

• S7-200	Yes
— PPI (point-to-point)	Yes
— PPI network	No
— MPI	Yes
— PROFIBUS DP	Yes
• S7-300/400	Yes
— MPI	Yes
— PROFIBUS DP	Yes
— PROFINET	No
• S5	Yes
— serial	Yes
— PROFIBUS DP	Yes
• TI 505	Yes
• Allen Bradley (DF1)	Yes
• Allen Bradley (DF485)	Yes
• Mitsubishi (FX)	Yes
• Mitsubishi (MP4)	Yes
• Telemecanique (ADJUST)	Yes
• Telemecanique (Uni-Telway)	Yes
• OMRON (LINK/Multilink)	Yes
• Modicon (Modbus)	Yes
• GE-Fanuc (SNP)	Yes
<b>Functions</b>	
• Key repeat	No
• TAB sequence	Yes
• Calculating functions	Yes
• Animate	Yes
• Menu tree editor	No
• Unit switchover	No
<b>Service tools/configuration aids</b>	
• Clean screen	Yes
• Touch calibration	Yes
• Backup/Restore manually	Yes
• Simulation	Yes
• Device switchover	Yes
• Delta transfer	Yes
• Monitoring function for battery and memory	Yes
• Trace (operation archive)	No
<b>Expandability/openness</b>	
• Open Platform Program	Yes
<b>Peripherals/Options</b>	

Peripherals	Printer, barcode reader
-------------	-------------------------

#### Dimensions

Width of the housing front	212 mm
Height of housing front	156 mm
Overall depth	59 mm

#### Weights

Weight (without packaging)	1 kg
----------------------------	------

#### Other

free hotline	Yes
Warranty period	1 y

**last modified:** 04/23/2018